

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 110 732 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
27.06.2001 Bulletin 2001/26

(51) Int Cl.7: **B41J 2/09**

(21) Application number: **00204448.5**

(22) Date of filing: **11.12.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

- Chwalek, James M., Eastman Kodak Company
Rochester, New York 14650-2201 (US)
- Trauernicht, David P., Eastman Kodak Company
Rochester, New York 14650-2201 (US)

(30) Priority: **22.12.1999 US 470638**

(71) Applicant: **EASTMAN KODAK COMPANY**
Rochester, New York 14650-2201 (US)

(74) Representative:
Lewandowsky, Klaus, Dipl.-Ing. et al
Kodak Aktiengesellschaft,
Patentabteilung
70323 Stuttgart (DE)

(72) Inventors:
• Delametter, Christopher N.,
Eastman Kodak Company
Rochester, New York 14650-2201 (US)

(54) Deflection enhancement for continuous ink jet printers

(57) A continuous ink jet printer having improved ink drop placement and image quality insuring from importing enhanced lateral flow characteristics, by geometric obstruction (20) within it's ink delivery channel (4), which, in turn, enables enhanced ink drop deflection.

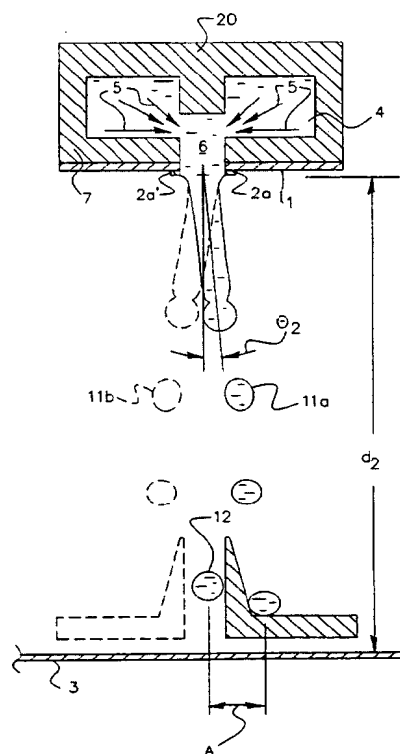


FIG. 4

EP 1 110 732 A2

Description

[0001] The present invention relates generally to the field of digitally controlled ink jet printing systems. It particularly relates to improving those systems that asymmetrically heat a continuous ink stream, in order to deflect the stream's flow between a non-print mode and a print mode.

[0002] Ink jet printing is only one of many digitally controlled printing systems. Other digital printing systems include laser electrophotographic printers, LED electrophotographic printers, dot matrix impact printers, thermal paper printers, film recorders, thermal wax printers, and dye diffusion thermal transfer printers. Ink jet printers have become distinguished from the other digital printing systems because of the ink jet's non-impact nature, its low noise, its use of plain paper, and its avoidance of toner transfers and filling.

[0003] The ink jet printers can be categorized as either drop-on-demand or continuous systems. However, it is the continuous ink jet system which has gained increasingly more recognition over the years. Major developments in continuous ink jet printing are as follows:

[0004] Continuous ink jet printing itself dates back to at least 1929. See U.S. Patent 1,941,001 which issued to Hansell that year.

[0005] U.S. Patent No. 3,373,437, which issued to Sweet et al. in March 1968, discloses an array of continuous ink jet nozzles wherein ink drops to be printed are selectively charged and deflected towards the recording medium. This technique is known as binary deflection continuous ink jet printing, and is used by several manufacturers, including Elmjet and Scitex.

[0006] U.S. Patent No. 3,416,153, issued to Hertz et al. in December 1968. It discloses a method of achieving variable optical density of printed spots, in continuous ink jet printing. Therein the electrostatic dispersion of a charged drop stream serves to modulate the number of droplets which pass through a small aperture. This technique is used in ink jet printers manufactured by Iris.

[0007] U.S. Patent No. 4,346,387, also issued to Hertz, but it issued in 1982. It discloses a method and apparatus for controlling the electrostatic charge on droplets. The droplets are formed by the breaking up of a pressurized liquid stream, at a drop formation point located within an *electrostatic charging tunnel*, having an electrical field. Drop formation is effected at a point in the electric field, corresponding to whatever predetermined charge is desired. In addition to charging tunnels, deflection plates are used to actually deflect the drops.

[0008] Until recently, conventional continuous ink jet techniques all utilized, in one form or another, *electrostatic charging tunnels* that were placed close to the point where the drops are formed in a stream. In the tunnels, individual drops may be charged selectively. The selected drops are charged and deflected downstream by the presence of deflector plates that have a large potential difference between them. A gutter (sometimes re-

ferred to as a "catcher") is normally used to intercept the charged drops and establish a non-print mode, while the uncharged drops are free to strike the recording medium in a print mode as the ink stream is thereby deflected, between the "non-print" mode and the "print" mode.

[0009] A continuous ink jet printer system has been suggested which renders the above-described *electrostatic charging tunnels* unnecessary. Additionally, it serves to better couple the functions of (1) droplet formation and (2) droplet deflection. The printer system comprises an ink delivery channel, a source of pressurized ink in communication with the ink delivery channel, and a nozzle having a bore which opens into the ink delivery channel, from which a continuous stream of ink flows. A droplet generator inside the nozzle causes the ink stream to break up into a plurality of droplets at a position spaced from the nozzle. The droplets are deflected by heat from a heater (in the nozzle bore) which heater has a selectively actuated section, i.e. a section associated with only a portion of the nozzle bore. Selective actuation of a particular heater section, at a particular portion of the nozzle bore produces what has been termed an asymmetrical application of heat to the stream. Alternating the sections can, in turn, alternate the direction in which this asymmetrical heat is applied and serves to thereby deflect the ink droplets, inter alia, between a "print" direction (onto a recording medium) and a "non-print" direction (back into a "catcher").

[0010] Asymmetrically applied heat results in stream deflection, the magnitude of which depends upon several factors, e.g. the geometric and thermal properties of the nozzles, the quantity of applied heat, the pressure applied to, and the physical, chemical and thermal properties of the ink. Although solvent-based (particularly alcohol-based) inks have quite good deflection patterns, and achieve high image quality in asymmetrically heated continuous ink jet printers, water-based inks until now, have not. Water-based inks require a greater degree of deflection for comparable image quality than the asymmetric treatment, jet velocity, spacing, and alignment tolerances have in the past allowed. Accordingly, a means for enhancing the degree of deflection for such continuous ink jet systems, within system tolerances would represent a surprising but significant advancement in the art and satisfy an important need in the industry for water-based, and thus more environmentally friendly inks.

[0011] It is therefore a principal object of the present invention to improve the magnitude of ink droplet deflection within continuous ink jet asymmetrically heated printing systems, without negating otherwise acceptable system tolerances.

[0012] With the above object in view, the invention is defined by the several claims appended hereto.

[0013] According to an aspect of the invention, lateral flow of ink entering the nozzle bore section of a continuous ink jet printer system is increased. The printer system is of the type employing asymmetrical heating for

drop deflection. Said lateral flow is increased by imposing particular geometric obstructions at a position upstream from the nozzle bore entrance.

[0014] Figure 1 shows a schematic diagram of an exemplary continuous ink jet print head and nozzle array as a print medium (e.g. paper) rolls under the ink jet print head.

[0015] Figure 2 is a cross-sectional view of one nozzle tip from a prior art nozzle array showing d_1 (distance to print medium) and θ_1 (angle of deflection).

[0016] Figure 3 shows a top view directly into a nozzle with an asymmetric heater surrounding the nozzle.

[0017] Figure 4 is a cross-sectional view of one nozzle tip from one embodiment of the present invention showing d_2 and θ_2 .

[0018] Figure 5 is a cross-sectional view of one nozzle tip from a preferred embodiment of the present invention showing d_3 and θ_3 .

[0019] Figure 6 is a graph illustrating the relationships between $d_1 - d_3$, $\theta_1 - \theta_3$, and A.

[0020] The present description will be directed, in particular, to elements forming part of, or cooperating directly with, apparatus or processes of the present invention. It is to be understood that elements not specifically shown or described may take various forms well known to those skilled in the art.

[0021] Referring to Figure 1, a continuous ink jet printer system is generally shown at 10. The print head 1, from which extends an array of nozzle heaters 2, houses heater control circuits (not shown) which process signals to an ink pressure regulator (not shown).

[0022] Heater control circuits read data from the image memory, and send time-sequenced electrical pulses to the array of nozzle heaters 2. These pulses are applied at an appropriate time, and to the appropriate nozzle, so that drops formed from a continuous ink jet stream will form spots on a recording medium 3, in the appropriate position designated by the data sent from the image memory. Pressurized ink travels from an ink reservoir (not shown) to an ink delivery channel 4 and through nozzle array 2 onto either the recording medium 3 or the gutter 9.

[0023] Referring now to Figure 2, an enlarged cross-sectional view of a single nozzle heater 2a/2a' from among the nozzle array 2 shown in Figure 1, is illustrated, as it is in the prior art. Note that ink delivery channel 4 shows arrows 5 that depict a substantially vertical flow pattern of ink headed into nozzle bore 6. There is a relatively thick wall 7 which serves, inter alia, to insulate the ink in the channel 4 from heat generated in the nozzle heater 2a/2a'. Thick wall 7 may also be referred to as the "orifice membrane." An ink stream 8 forms as a meniscus of ink initially leaving the nozzle 2a/2a'. At a distance below the nozzle 2a/2a' ink stream 8 breaks into a plurality of drops 11.

[0024] Figure 3 is an expanded bottom view of heater 2a/2a' showing the line 2-2, along which line the Figure 2 cross-sectional illustration is viewed. Heater 2a/2a'

can be seen to have two sections (sections 2a and 2a'). Each section covers approximately one half of the nozzle bore opening 6. Alternatively, heater sections can vary in number and sectional design. One section provides a common connection G, and isolated connection P. The other has G' and P' respectively. Asymmetrical application of heat merely means applying electrical current to one or the other section of the heater independently. By so doing, the heat will deflect the ink stream 8, and deflect the drops 11, away from the particular source of the heat. For a given amount of heat, the ink drops 11 are deflected at an angle θ_1 (in Figure 2) and will travel a vertical distance d_1 onto recording media 3 from the print head. There also is a distance "A", which distance defines the space between where the deflection angle θ_1 would place the deflected drops 11 on the recording media (or a catcher) and where the drops 12 would have landed without deflection. The stream deflects in a direction anyway from the application of heat. The ink gutter 9 is configured to catch deflected ink droplets 11 while allowing undeflected drop 12 to reach a recording medium. An alternative embodiment of the present invention could reorient ink gutter ("catcher") 9 to be placed so as to catch undeflected drops 12 while allowing deflected drops 11 to reach the recording medium.

[0025] The ink in the delivery channel emanates from a pressurized reservoir (not shown), leaving the ink in the channel under pressure. In the past the ink pressure suitable for optimal operation would depend upon a number of factors, particularly geometry and thermal properties of the nozzles and thermal properties of the ink. A constant pressure can be achieved by employing an ink pressure regulator (not shown).

[0026] Referring to Figure 4, in the operation of the present invention, the lateral course of ink flow patterns 5 in the ink delivery channel 4, are enhanced by, a geometric obstruction 20, placed in the delivery channel 4, just below the nozzle bore 6. This lateral flow enhancing obstruction 20 can be varied in size, shape and position, but serves to improve the deflection by many times x, based upon the lateralness of the flow and can therefore reduce the dependence upon ink properties (i.e. surface tension, density, viscosity, thermal conductivity, specific heat, etc.), nozzle geometry, and nozzle thermal properties while providing greater degree of control and improved image quality. Preferably the obstruction 20 has a lateral wall parallel to the reservoir side of wall 7, such as squares, cubes, rectangles, triangles, etc. The deflection enhancement may be seen by comparing for example the margins of difference between θ_1 of Figure 2 and θ_2 of Figure 4. This increased stream deflection enables improvements in drop placement (and thus image quality) by allowing the recording medium 3 to be placed closer to the print head 1 (d_2 is less than d_1) while preserving the other system level tolerances (i.e. spacing, alignment etc.) for example see distance A. The orifice membrane or wall 7 can also be thinner. We have found

that a thinner wall provides additional enhancement in deflection which, in turn, serves to lessen the amount of heat needed per degree of the angle of deflection θ_2 .

[0027] Referring now to Figure 5 drop placement and thus image quality can be even further enhanced by an obstruction 20 which provides almost total lateral flow at the entrance to nozzle bore 6. The distance d_3 to print medium 3 is again lessened per degree of heat because deflection angle θ_3 can be increased per unit temperature.

[0028] Figure 6 shows the relationship of a constant drop placement A as distances to the print media d_1 , d_2 , and d_3 become less and less and as deflection angles θ_1 , θ_2 , and θ_3 become increasingly larger. As a consequence of enhanced lateral flow, the ability to miniaturize the printer's structural dimensions while enhancing image size and enhancing image detail is achieved.

Claims

1. Apparatus for controlling ink in a continuous ink jet printer in which a continuous stream of ink (8) is emitted from a nozzle, said apparatus comprising:

an ink delivery channel (4) having disposed therein a geometric obstruction (20) to include lateral flow of the ink at a predetermined magnitude;

a source of pressurized ink;

the source of pressurized ink communicating with the ink delivery channel;

a nozzle bore (6) which opens into the ink delivery to establish a continuous flow of ink in a stream, the nozzle bore defining a nozzle bore perimeter; and

a nozzle heater having a selectively actuated section (2a, 2a') associated with only a portion of the nozzle bore perimeter, whereby actuation of the heater section produces an asymmetric application of heat to the stream which controls the stream direction thereby enabling the stream to deflect in a direction away from the applied heat, and which deflection is in a magnitude proportional to the lateral flow magnitude.

2. The apparatus of claim 1, wherein the geometric obstruction has a lateral wall parallel to the orifice membrane wall.

3. The apparatus of claim 2, wherein the geometric obstruction's lateral wall has a length which is proportional to the magnitude of the lateral flow.

4. The apparatus of claim 2, wherein the geometric obstruction is selected from the group of geometrics consisting of rectangular, square, cubical and trian-

gular.

5. Apparatus of claim 1, wherein the magnitude of deflection is enhanced as the orifice membrane wall is reduced in thickness.

6. A method for improving the image quality of the continuous ink jet printer of claim 1, said method comprising increasing the lateral ink flow in order to increase the magnitude of deflection.

7. The method of claim 6, further comprising reducing the orifice membrane wall's thickness in order to improve deflection.

8. The apparatus of claim 1, further comprising a distance (d_1 , d_2 , d_3) between the nozzle heater and a recording medium (3) onto which the ink prints, said distance being less than such distance for ink jet printers having no geometric obstructions to induce lateral flow.

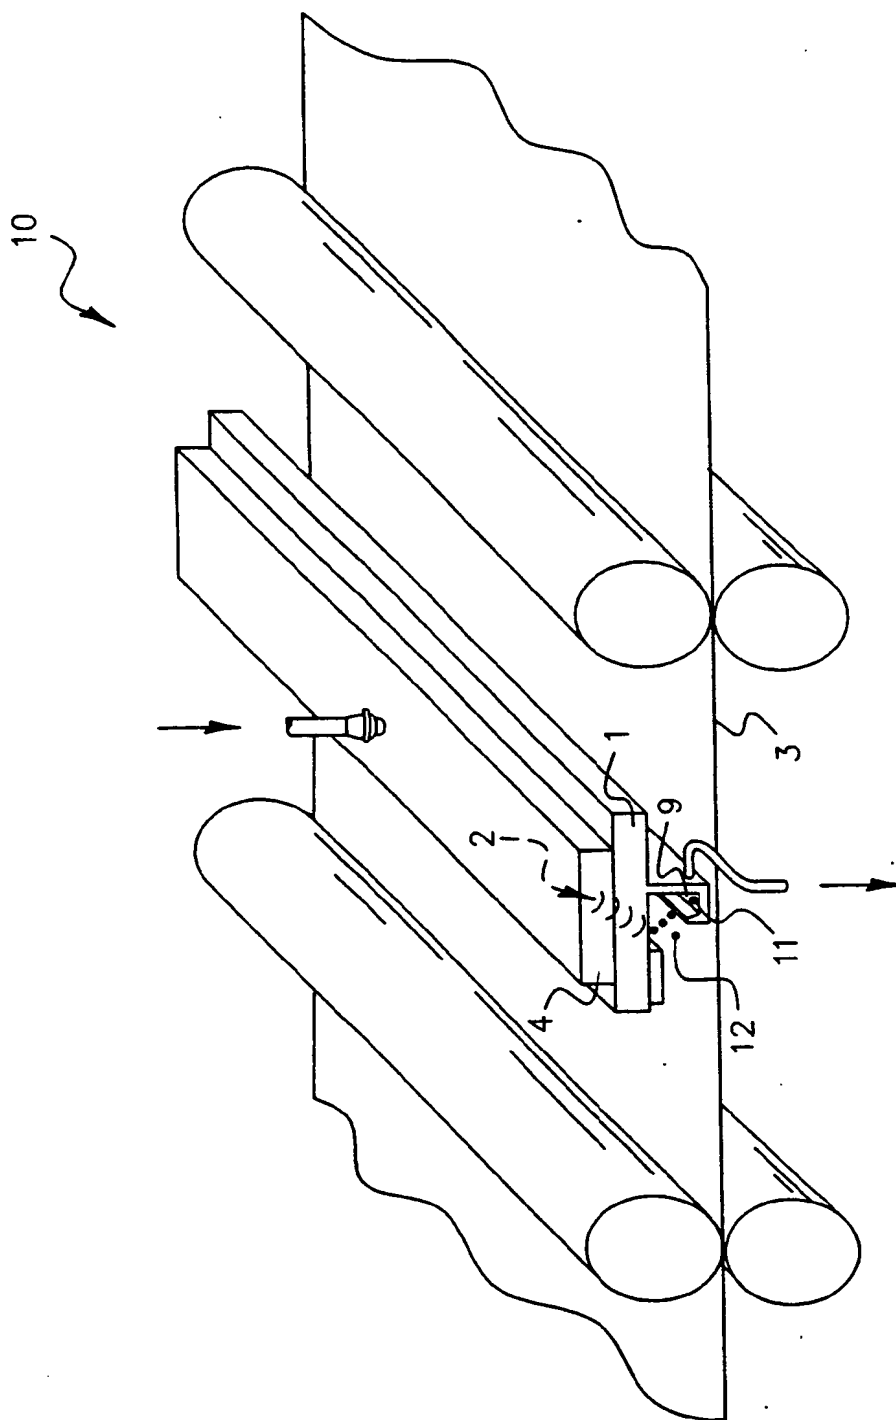


FIG. 1

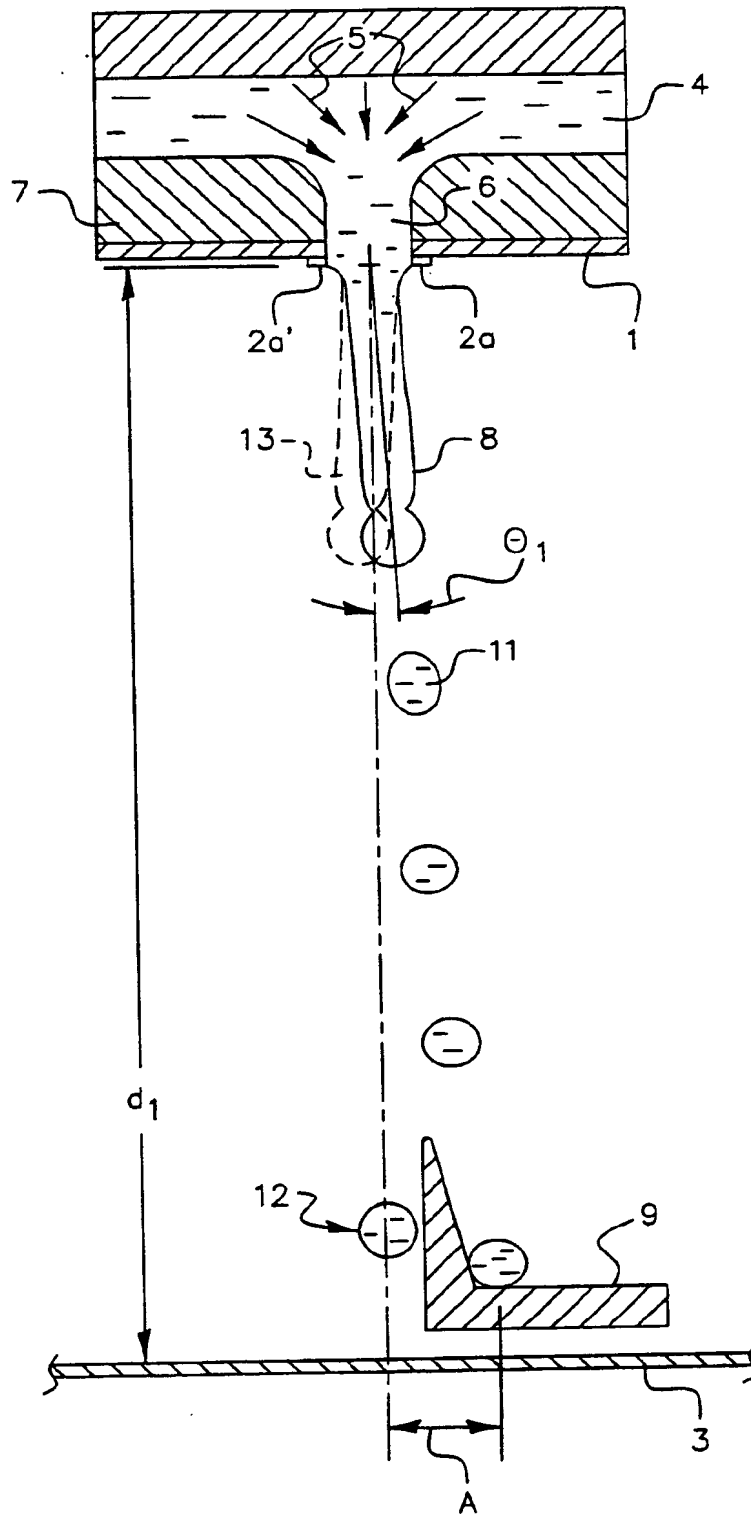


FIG. 2 (prior art)

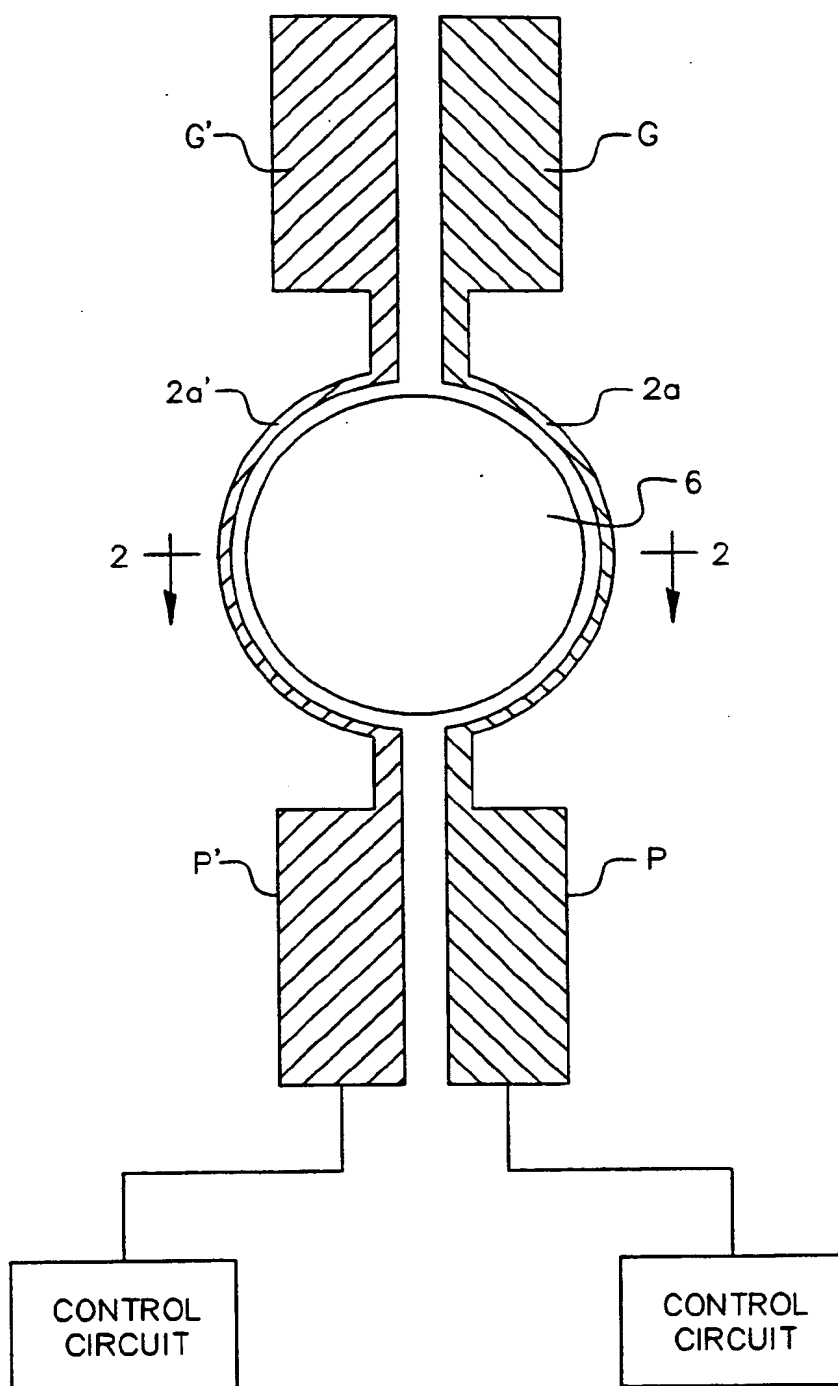


FIG. 3

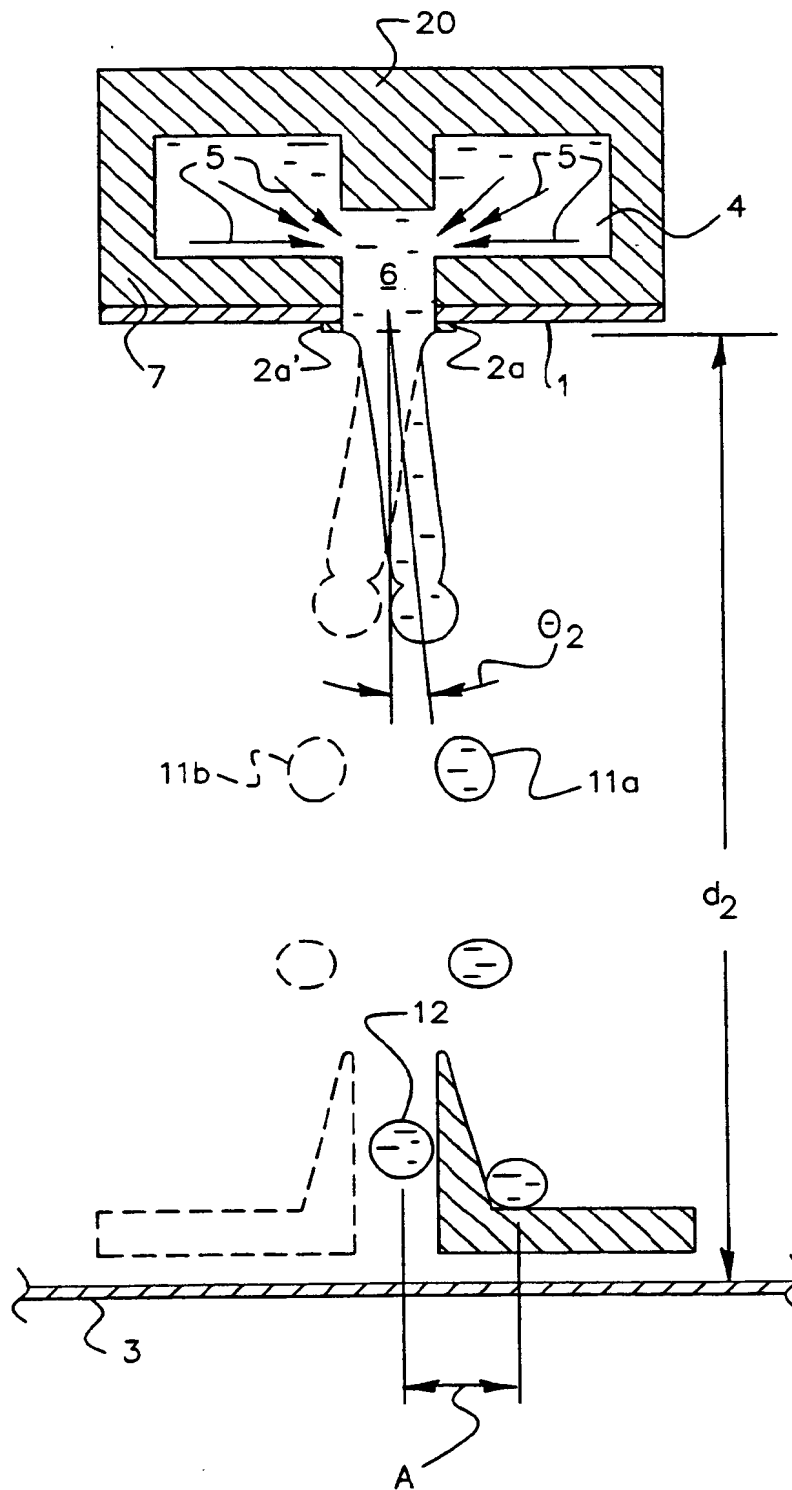


FIG. 4

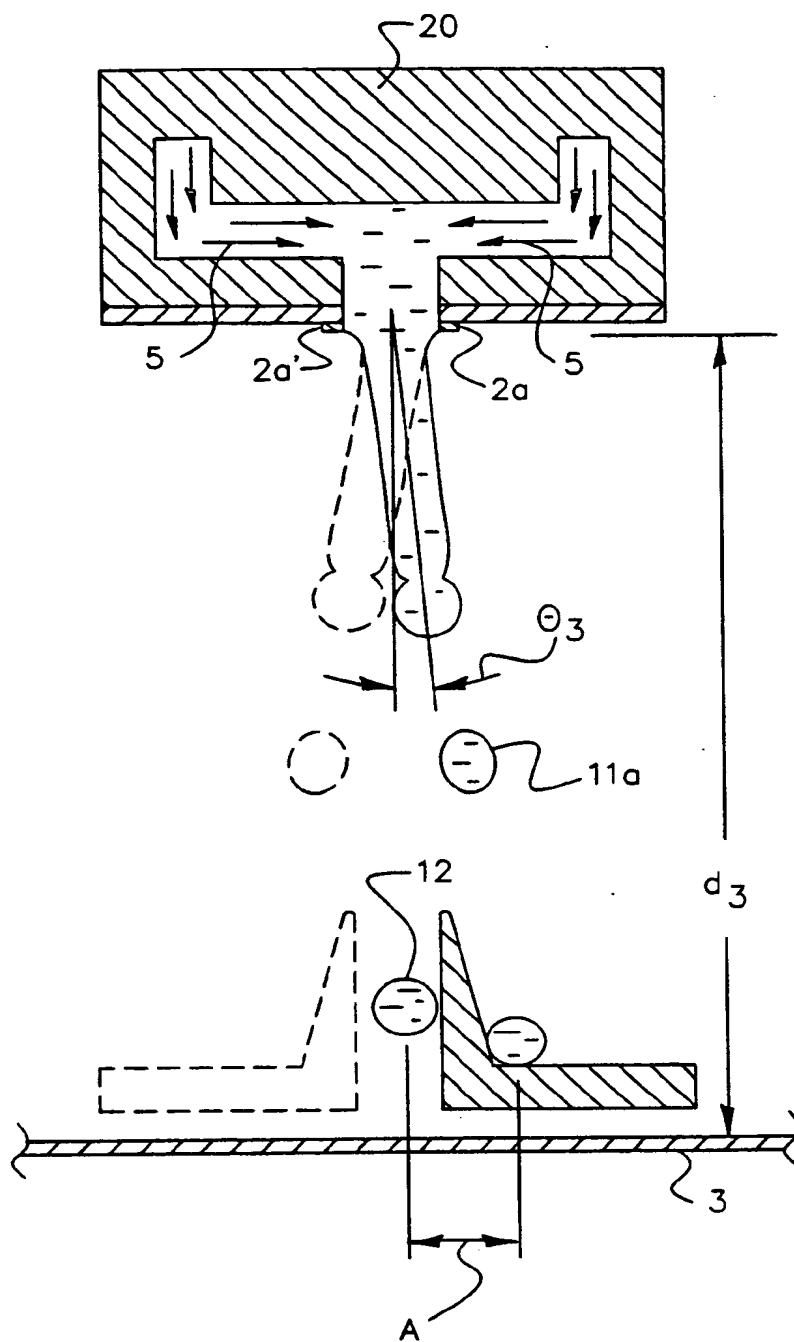


FIG. 5

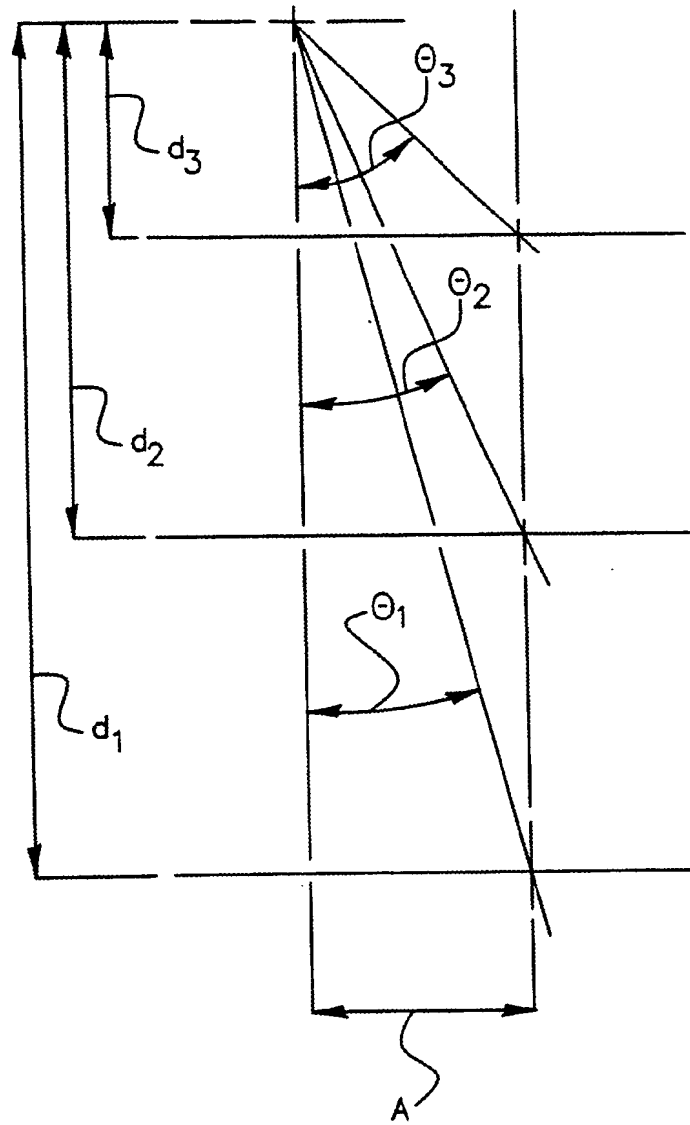


FIG. 6

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 110 732 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
12.06.2002 Bulletin 2002/24

(51) Int Cl.7: **B41J 2/09**

(43) Date of publication A2:
27.06.2001 Bulletin 2001/26

(21) Application number: **00204448.5**

(22) Date of filing: **11.12.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

- Chwalek, James M., Eastman Kodak Company
Rochester, New York 14650-2201 (US)
- Trauernicht, David P., Eastman Kodak Company
Rochester, New York 14650-2201 (US)

(30) Priority: **22.12.1999 US 470638**

(71) Applicant: **EASTMAN KODAK COMPANY**
Rochester, New York 14650-2201 (US)

(74) Representative:
Nunney, Ronald Frederick Adolphe et al
Kodak Limited (W92)
Patents
Headstone Drive
Harrow, Middlesex HA1 4TY (GB)

(72) Inventors:
• Delametter, Christopher N.,
Eastman Kodak Company
Rochester, New York 14650-2201 (US)

(54) Deflection enhancement for continuous ink jet printers

(57) A continuous ink jet printer having improved ink drop placement and image quality insuring from importing enhanced lateral flow characteristics, by geometric obstruction (20) within it's ink delivery channel (4), which, in turn, enables enhanced ink drop deflection.

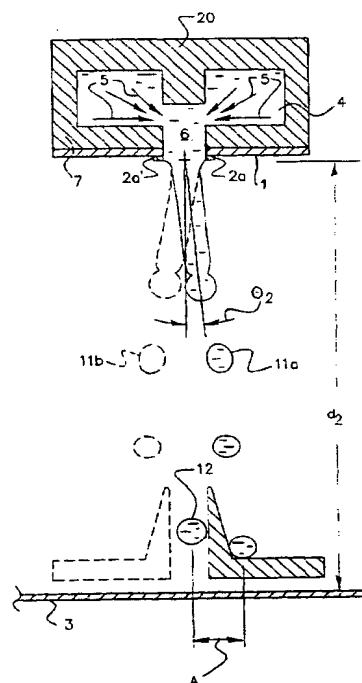


FIG. 4

EP 1 110 732 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 20 4448

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 3 878 519 A (EATON JAMES H) 15 April 1975 (1975-04-15) * column 6, line 6 - line 35; figures 5,6 *	1-8	B41J2/09
X	EP 0 911 167 A (EASTMAN KODAK CO) 28 April 1999 (1999-04-28) * column 6, line 43 - column 7, line 32; figure 3A *	1-8	
X	US 3 893 623 A (TOUPIN RICHARD A) 8 July 1975 (1975-07-08) * column 2, line 12 - line 28; figure 1 *	1-8	
A	US 5 841 452 A (SILVERBROOK KIA) 24 November 1998 (1998-11-24) * column 8, line 64 - column 9, line 24; figures 14-16 *	1	
A	EP 0 308 272 A (HEWLETT PACKARD CO) 22 March 1989 (1989-03-22) * page 7, line 7 - line 36; figure 6 *	1	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	EP 0 474 472 A (XEROX CORP) 11 March 1992 (1992-03-11)		B41J
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 16 April 2002	Examiner Adam, E
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application I : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P24C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 20 4448

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-04-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 3878519	A	15-04-1975	CA 1013019 A1	28-06-1977
			DE 2460913 A1	07-08-1975
			FR 2259647 A1	29-08-1975
			GB 1452866 A	20-10-1976
			IT 1027657 B	20-12-1978
			JP 980904 C	18-12-1979
			JP 50110230 A	30-08-1975
			JP 54013783 B	02-06-1979
EP 0911167	A	28-04-1999	EP 0911167 A2	28-04-1999
			JP 11216867 A	10-08-1999
US 3893623	A	08-07-1975	BE 823683 A1	16-04-1975
			CA 1014592 A1	26-07-1977
			CH 572397 A5	13-02-1976
			CS 203902 B2	31-03-1981
			DE 2453036 A1	03-07-1975
			ES 432831 A1	01-11-1976
			FR 2255112 A1	18-07-1975
			GB 1446269 A	18-08-1976
			IT 1025690 B	30-08-1978
			JP 1027237 C	25-12-1980
			JP 50098347 A	05-08-1975
			JP 55018626 B	20-05-1980
			NL 7416099 A	24-06-1975
			SE 403842 B	04-09-1978
			SE 7415971 A	23-06-1975
			YU 322374 A ,B	28-02-1981
US 5841452	A	24-11-1998	AT 136500 T	15-04-1996
			AT 145589 T	15-12-1996
			AT 144741 T	15-11-1996
			AU 657930 B2	30-03-1995
			AU 8999691 A	06-08-1992
			AU 657931 B2	30-03-1995
			AU 8999891 A	06-08-1992
			AU 657720 B2	23-03-1995
			AU 9000191 A	06-08-1992
			DE 69209684 D1	15-05-1996
			DE 69209684 T2	17-10-1996
			DE 69214853 D1	05-12-1996
			DE 69214853 T2	28-05-1997
			DE 69215397 D1	09-01-1997
			DE 69215397 T2	05-06-1997
			EP 0498291 A1	12-08-1992
			EP 0498292 A2	12-08-1992

EPO FORM P0496

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 20 4448

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-04-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5841452	A		EP 0498293 A2	12-08-1992
			JP 3015573 B2	06-03-2000
			JP 6040037 A	15-02-1994
			JP 3179545 B2	25-06-2001
			JP 5338171 A	21-12-1993
			JP 3179546 B2	25-06-2001
			JP 5338172 A	21-12-1993
			US 5815173 A	29-09-1998
			US 6019457 A	01-02-2000
			AU 676133 B2	06-03-1997
			AU 657929 B2	30-03-1995
			AU 667295 B2	21-03-1996
EP 0308272	A	22-03-1989	US 4812859 A	14-03-1989
			CA 1328574 A1	19-04-1994
			DE 3867398 D1	13-02-1992
			EP 0308272 A1	22-03-1989
			HK 97193 A	24-09-1993
			JP 1110965 A	27-04-1989
			JP 2863761 B2	03-03-1999
			KR 9107322 B1	25-09-1991
			SG 393 G	12-03-1993
EP 0474472	A	11-03-1992	US 5068006 A	26-11-1991
			CA 2047804 A1	05-03-1992
			DE 69110996 D1	10-08-1995
			DE 69110996 T2	22-02-1996
			EP 0474472 A1	11-03-1992
			JP 4234667 A	24-08-1992

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82